




RELAY 'STATIC SINGLE PHASE ZERO-CROSSING Suitable for controlling single-phase resistive loads.

Diagnostic LED for the reporting of the presence of the load and of the control signal.


Internal protection to the overvoltage. Logic control 12-24V DC 10mA. Fixing for DIN rail.

Model	Item	I _{2t} 10mS.	Dimensions
M-GS15	5905	125 Amp.	H.80, L.24, P.108mm
M-GS20	5910	450 Amp.	H.138, L.24, P.108mm
M-GS40N	5915	880 Amp.	H.100, L.60, P.115mm

Thermal curves

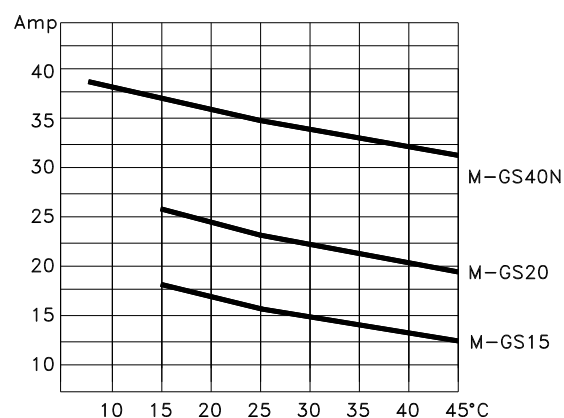

Connection
SINGLE PHASE



Test
Controlling
Load
Fuse

ON
Control signal

C/F
Presence
load fuse
(alternating with ON)

